

ANTHEM™

HIGH FREQUENCY X-RAY GENERATOR

High frequency technology,
combined with advanced
microprocessor control
design equals a generator
that is reliable and flexible to
the preferences of the
technologist.



User Friendly, Powerful and Compact



DEL MEDICAL
SYSTEMS GROUP



HIGH FREQUENCY GENERATOR SPECIFICATIONS

The **ANTHEM** operates in three user-friendly modes; APR (Anatomically Programmed Radiography), 2 point or 3 point technique set-up and allows customization of operation to meet the needs of the particular practice and the preferences of the technologist. Simply choose the region of interest, select the desired examination, then select patient size to display the preprogrammed technique. **ANTHEM's** programming process allows authorized personnel fast modification of the programmed mA, kV and/or time. When the 2 point operation of setting mAs and kV is used, the software will automatically choose the highest mA and shortest time to reduce motion and deliver high quality images. The traditional 3 point selection of kV, mA and time is provided to accommodate the needs of specialized views and the preference of some technologists.

ANTHEM Standard Features:

- 10 - 15 minute calibration
- Update APR by SD card or PC
- Integrated 24 volt AC/DC power supply
- Integrated line match transformer
- Range 208v to 480v A/C range
- APR – Anatomically Programmed Radiography
- Programmed techniques for 8 body regions and up to 12 views per region
- Two point operation provides individual control of kV and mAs
- Three point operation provides individual control of mA, kV and time
- LCD display
- Continuous kV stabilization
- Continuous mA stabilization
- Automatic line voltage compensation
- Tube protection software and circuitry
- Adjustable wall mount bracket
- Compact design minimizes space requirements

Available Configurations:


- 400 mA, 30 kW, 1P
- 500 mA, 30 kW, 1P
- 500 mA, 32 kW, 3P
- 500 mA, 40 kW, 1P
- 600 mA, 40 kW, 3P
- 650 mA, 50 kW, 3P

Options:

- Pedestal

Technical Specifications:

- Maximum mA: 650
- kW Rating: 30 - 50
- kVp Range: 40-125
- Two Point Operation: mAs Range: 1.0 - 600
- Three Point Operation: 15 mA Stations:
25S/50S/75S/100S/100L/150L/200L/250L/300L/350L/
400L/450L/500L/550L/600L/650L
Time Stations: 75

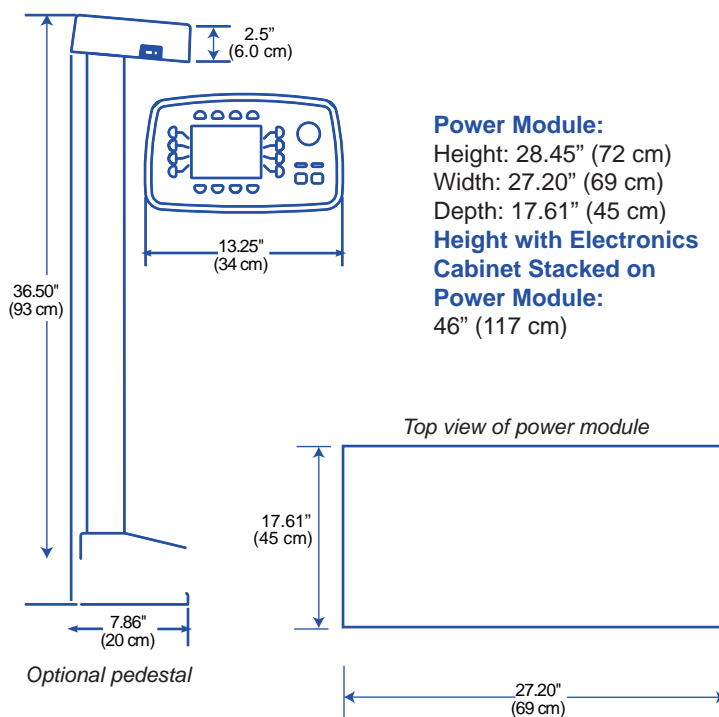

Del Medical is an ISO13485 & ISO9001 Certified Facility.
Complies with CDRH performance standards in effect at time of shipment. Specifications are subject to change without notice. UL 60601 approved.



U.S.A.
Del Medical Systems Group
50B North Gary Ave.
Roselle, IL 60172
Toll Free +1-800-800-6006
Tel: 847-288-7000
Fax: 847-288-7011



EUROPE
Villa Sistemi Medicali
Via delle Azalee 3
20090 Buccinasco-MI-Italy
Tel: +39-02-48 85 91
Fax: +39-02-48 81 844